




## Adjustable Power Base

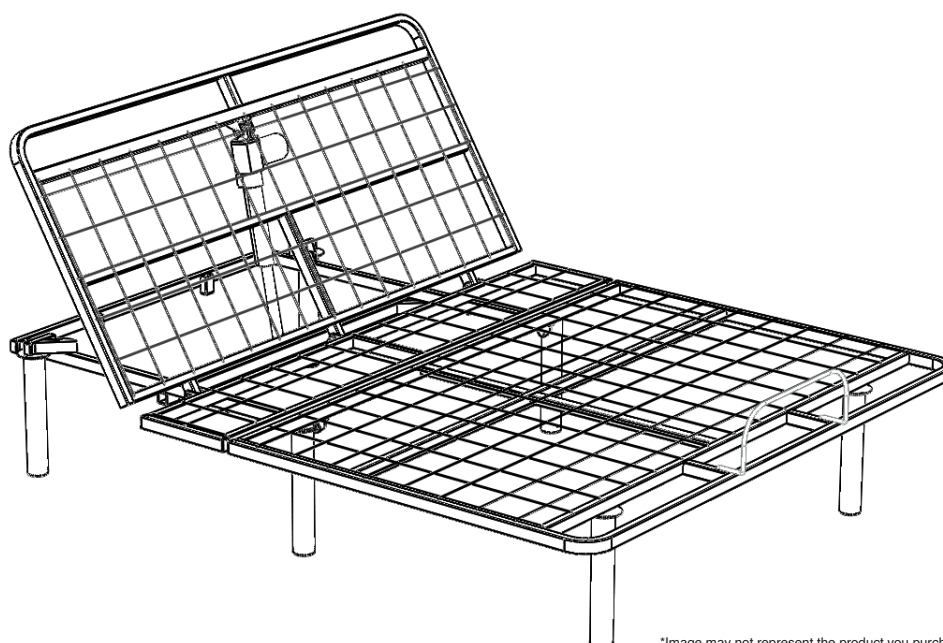

\*Image may not represent the product you purchased

### CONGRATULATIONS ON YOUR PURCHASE OF A REVERIE POWER BASE!

Please take a moment to review the setup instructions in the owners manual or review the setup video by scanning the QR code.



Your base comes with a 1 Year Limited Warranty.

**MAY BE PATENTED, SEE  
WWW.REVERIE.COM/PATENTS**

**WARNING! IMPORTANT SAFETY INSTRUCTIONS. PLEASE READ THESE INSTRUCTIONS THOROUGHLY BEFORE USING THIS PRODUCT. SAVE THESE INSTRUCTIONS!**

When using an electrical furnishing basic precautions should always be followed, including the following:

**READ ALL INSTRUCTIONS BEFORE USING (THIS FURNISHING)**

**DANGER:** To reduce the risk of electric shock: Always unplug this furnishing from the electrical outlet before cleaning.

**WARNING:**

To reduce the risk of burns, fire, electric shock, or injury to persons:

- Unplug from outlet before putting on or taking off parts.
- Close supervision is necessary when this furnishing is used by or near children, invalids or disabled persons.
- Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer.
- Never operate this furnishing if it has a damaged cord or plug, or if it is not working properly, dropped or damaged, or dropped into the water, call Reverie customer service.
- Keep the cord away from heated surfaces.
- Never drop or insert any object into any opening.
- Do not use outdoors.
- Do not operate where aerosol (spray) products are being used or where oxygen is being administered.
- To disconnect, turn all controls to the off position, then remove plug from outlet.

**WARNING:** Risk of Injury: Keep children away from under the head and foot of the base when moving.

**WARNING:** Risk of electric shock: Connect this furnishing to a properly grounded outlet only.

**GROUNDING INSTRUCTIONS:**

This product must be grounded. If it should malfunction or breakdown, grounding provides a path of least resistance for electric current to reduce the risk of electric shock. This product is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**DANGER:**

Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the product is properly grounded.

Do not modify the plug provided with the product. If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

FOR BEST RESULTS, YOUR POWER BASE SHOULD BE PLUGGED INTO A SURGE PROTECTOR (not included).

This product is for use on a circuit having a standard rating of 120 volts and is factory equipped with a specific electric cord and plug to permit connection to a proper electric circuit. Make sure that the product is connected to an outlet having the same configuration as the plug. No adapter should be used with this product. If the product must be reconnected for use on a different type of electric circuit, the reconnection should be made by qualified service personnel.

*Unauthorized modifications could void the electrical portion of your warranty.* Failure to use a properly grounded outlet for this product or modification of the plug will compromise this important grounding safety feature and may result in electrical shock, electrical fire, or faulty operation of the product.

**WARNING: PINCH POINT!** Do not reach under the base during operation.

**WARNING!**

DO NOT USE NEAR PEOPLE USING OR WEARING MEDICAL DEVICES. FOR HOUSEHOLD / RESIDENTIAL USE ONLY. DO NOT USE OUTDOORS. This product conforms to UL STD 962

**IMPORTANT SAFETY FEATURES:**

Use this furnishing only for its intended use as described in these instructions. Do not use attachments not recommended by the manufacturer. If there is an overload weight condition on the head or foot mechanism, the control unit will automatically stop all functions. Once the excess weight is removed the control unit will automatically allow all functions to resume operation after 30 seconds. As with any product that produces a vibrating motion, it is possible that some pacemakers may interpret this motion as a false sense of movement and or exercise. This may or may not affect your pacemaker. If you have any concerns, please consult your physician. For more information please contact customer service by calling 866-956-0500.

**USER-SERVICEABLE PARTS:**

This product is specifically designed to have no maintenance by you, the user. Therefore, you are encouraged not to open any motors, alter the wiring, adjust, modify or change the structure of the product, as it will void the warranty.

**POWER RATINGS:**

**INPUT: AC 100-240V - 50/60Hz, 1.5 Amp**  
**OUTPUT: DC 29V-2.24A**

**IN-HOME USE AND HOSPITAL DISCLAIMER:**

Your power base is strictly designed for in-home use only. It is NOT designed for hospital use and is NOT designed to meet hospital standards. Do not use this base with TENT TYPE oxygen therapy equipment or near explosive gases.

**SMALL CHILDREN AND PETS WARNING:**

After your Power Base has been unboxed, immediately dispose of packaging as it can smother small children and pets. To avoid injury, children and pets should not be allowed to play on or under the power base.

Children should not operate this product without adult supervision. Close supervision is necessary when this furnishing is used by, or near children, invalids, or disabled persons.

**SAVE THESE INSTRUCTIONS:**

Your Power Base has been designed to provide you with the reliable operation and durability you expect. This product has been inspected and tested prior to shipment.

For best performance, you should enter and exit the Power Base while it is in the flat or fully lowered position.

**DO NOT SIT ON THE HEAD OR FOOT SECTIONS WHILE IN THE RAISED POSITION.**

**PRODUCT RATINGS**

The lift motor in your Power Base is NOT designed for continuous use. Reliable operation and full life expectancy will be attained as long as the lift motor does not operate more than two (2) minutes over an eighteen (18) minute period, or approximately 10% duty cycle. Any attempt to circumvent or exceed this rating will shorten the life expectancy of this product and may void the warranty. The recommended weight restrictions for your Power Base is up to 650 lbs. total weight, including people and the mattress for all sizes of power bases. Lift speed will vary due to weight and mattress configuration, as well as the mattress type. The weight must be evenly distributed across the power base. This Product is not designed to support or lift 650 lbs of total weight in the head or foot sections of your Power Base alone, or in any unevenly distributed fashion. Some mattresses are not designed for Power Bases because they do not bend or flex well when adjusted. When using such a mattress with your Power Base the weight limits set forth herein do not apply, as the bending of the mattress requires significant force and puts significant strain on the motors and the Power Base itself.

**WARRANTY PRECAUTION:**


Do not open control box, motors or wireless remote controls (with the exception of the battery compartment if equipped). The warranty is void if these units are tampered with. Any repair or replacement of power base parts must be performed by an authorized technician.

**Note: Exceeding the recommended weight restrictions could damage your power base and void your warranty and using a mattress on top of your power base that is not designed for adjustability may also void your warranty.**

### IMPORTANT UNPACKING INSTRUCTIONS

To avoid damage to the power base, always open the carton while the power base is laying in the FLAT position on the floor.

### OPEN FLAT

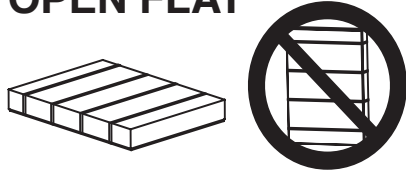

### Package contents:

Remote Control  
Mattress Retainer Bar  
Power Adapter  
Base Legs  
U-Pins (2) (Queen size only)  
Cotter Pins (4) (Queen size only)  
Y-cable (Optional for Tandem control)

### STEP 1

Carefully pull the folded power base unit out of the shipping carton. Remove and discard the plastic bag.

**WARNING: PACKAGING MATERIAL MAY SMOTHER SMALL CHILDREN AND PETS**

### STEP 2 (QUEEN SIZE ONLY)

Locate the 2 bags attached to the frame, each containing a U-Pin and 2 Cotter Pins. Remove them from the frame and set them aside for Step 5.

### STEP 3

Remove the fasteners securing the base in the folded position. Unfold the base keeping the unit top side down. For safety reasons, this should be performed by 2 people.



### STEP 4

Remove the securing fasteners from the accessory components and set the accessories aside. Also remove the zip ties securing the excess cord from the motors of the power base.

### STEP 5 (QUEEN SIZE ONLY)



Install the U-Pins from step 2 into the brackets as shown below. Insert the Cotter Pins into each hole in the U-Pin to lock the base in the unfolded configuration.

**NOTE:** For ease of U-Pin installation, lift the head section of the base slightly, allowing the U-Pin to insert smoothly into the bracket.

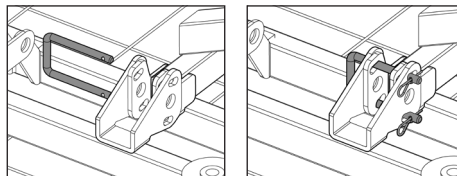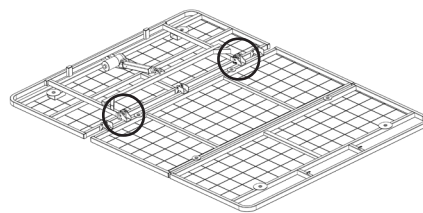

### STEP 6

Assemble the power base legs. Screw them in a clockwise direction into the threaded holes in the frame. Depending on your base's size, you may have 6 or 8 legs to install.

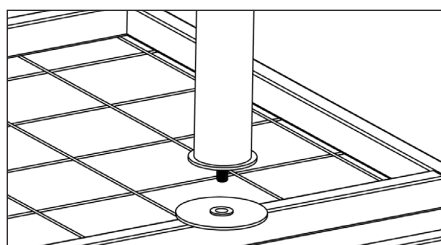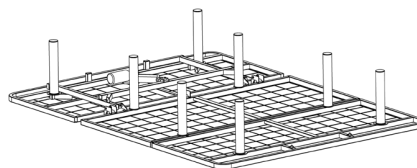

### STEP 7

Carefully flip the power base over with 2 people, to the topside-up position. Put the cover on the bed.



### ATTENTION!

Improper handling

### DO NOT

lean the power base against the installed legs to flip it over.



### STEP 8


Plug the power cord into a grounded electrical outlet. A green indicator light will turn on.

**WARNING: POWER CORDS MUST NOT INTERFERE WITH ANY POWER BASE MECHANISMS.**

**NOTE:** An electrical surge protection unit is recommended (not included)


### STEP 9

Insert the mattress retainer bar into the two mount holes located at the foot end of the power base.

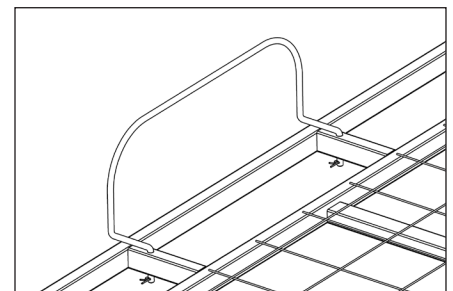

### STEP 10

Secure the mattress retainer bar underneath the base using the provided cotter pins, as shown in the image below.

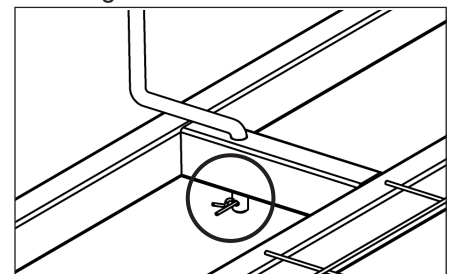

## IF YOU HAVE A WIRELESS REMOTE

Your remote is already paired with your power base. Follow the below instructions for replacement remote pairing.

### STEP 1

Place batteries into the remote control (3 x AAA batteries).

### STEP 2

Ensure the power base is plugged into a functioning outlet.

### STEP 3

Press and hold the pairing button on the control box until the indication light blinks.

### STEP 4

Press any button on the remote control. When the control box light turns solid, the remote should be successfully paired.

### STEP 5

Test and verify the remote is correctly paired by activating functions of the power base. You have now completed the pairing process.

## How To Unpair a Remote

To unpair a remote, simply pair another remote twice, to unpair the previously paired remote.

**NOTE:** To activate the Lock and Unlock feature, hold the button for 3 seconds.

## IF YOU HAVE A WIRED REMOTE

If you have a wired remote and want to connect to 2 power bases that will move in tandem as a single unit, follow the below instructions. For reference, bases will be referred to as "Base A" and "Base B", but are not actually labeled as such in person.

### STEP 1


Make sure both Base A and Base B are set up and positioned closely side-by-side together. (Ignore this step for Split Top Queen setup. For the following steps, Base A/B will refer to Side A/B).

### STEP 2

Unplug both wired remote controls from their lift motors and set aside.

### STEP 3

Remove and extend one of the provided Y-Cables.

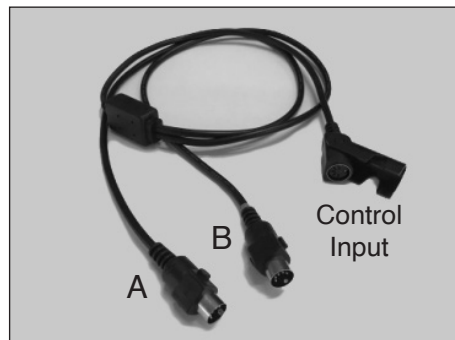

### STEP 4

Plug in the "A" output of the Y-Cable into Base A control port.

### STEP 5

Plug in the "B" output of the Y-Cable into Base B control port.

### STEP 6

Plug one of the provided hardwired remote controls into the "Control Input" side of the Y-Cable.

### STEP 7

Route the control cable to your preferred side of the bed.

## Emergency Power Down Feature

Your power base has an emergency lowering feature in the event that your power base is in the raised position and has lost power due to a power outage.

### STEP 1

Locate and remove the cover for the 9 volt batteries on the control box or power supply box.

### STEP 2

Install the two (2) alkaline 9 volt batteries and reinstall the battery cover.

### STEP 3

Press the "FLAT" button or the individual lowering buttons.

### STEP 4

Once the bed returns to the flat position, remove the batteries.

**NOTE:** DO NOT raise the base when powered with only backup batteries. The batteries are only intended to lower the base in case of emergency.

### Register Online

For easy registration of your warranty visit: <https://reverie.com/register-your-warranty>

Please prepare a digital copy of your proof of purchase (invoice or sales receipt) when registering online. You may be required to provide the Serial Number for registration, you can find it on the Law Tags attached to the base.

Manufactured by Reverie®  
1-800-973-8374

For Warranty and Service:  
customerservice@reverie.com

Please have your receipt ready and available.

Thank you and enjoy your power base.